

UTILITY
PATENT APPLICATION
TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No. 35.C13980

First Named Inventor or Application Identifier

SATORU MOTOHASHI ET AL.

Express Mail Label No.

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

1. ☒ Fee Transmittal Form
(Submit an original, and a duplicate for fee processing)

2. ☒ Specification Total Pages 30

3. ☒ Drawing(s) (35 USC 113) Total Sheets 6

4. ☒ Oath or Declaration Total Pages 3

- a. ☐ Newly executed (original or copy)
b. ☒ Unexecuted for information purposes
c. ☐ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 17 completed)
[Note Box 5 below]

i. ☐ DELETION OF INVENTOR(S)
Signed Statement attached deleting inventor(s)
named in the prior application, see 37 CFR
1.63(d)(2) and 1.33(b).

5. ☐ Incorporation By Reference (useable if Box 4c is checked)
The entire disclosure of the prior application, from which a copy of the
oath or declaration is supplied under Box 4c, is considered as being
part of the disclosure of the accompanying application and is hereby
incorporated by reference therein.

6. ☐ Microfiche Computer Program (Appendix)

7. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)

- a. ☐ Computer Readable Copy
b. ☐ Paper Copy (identical to computer copy)
c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☐ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney
(when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
14. ☐ Small Entity Statement(s) ☐ Statement filed in prior application
Status still proper and desired
15. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
16. ☐ Other: _____

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. ____/____

18. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Label

05514

(Insert Customer No. or Attach bar code label here)

or ☐ Correspondence address below

NAME				
Address				
City	State	Zip Code		
Country	Telephone	Fax		



CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
	TOTAL CLAIMS (37 CFR 1.16(c))	9-20 =	0	X \$ 18.00 =	\$ 0
	INDEPENDENT CLAIMS (37 cfr 1.16(b))	1-3 =	0	X \$ 78.00 =	\$ 0
	MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.16(d))			\$260.00 =	\$ 260.00
				BASIC FEE (37 CFR 1.16(a))	\$760.00
	Total of above Calculations =				\$ 1020.00
	Reduction by 50% for filing by small entity (Note 37 CFR 1.9, 1.27, 1.28).				
	TOTAL =				\$ 1020.00

19. Small entity status

- a. ☐ A Small entity statement is enclosed
- b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.
- c. ☐ Is no longer claimed.

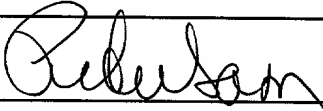
20. ☒ A check in the amount of \$ 1020.00 to cover the filing fee is enclosed.

21. ☐ A check in the amount of \$ _____ to cover the recordal fee is enclosed.

22. The Commissioner is hereby authorized to credit overpayments or charge the following fees to Deposit Account No. 06-1205:

- a. ☒ Fees required under 37 CFR 1.16.
- b. ☒ Fees required under 37 CFR 1.17.
- c. ☐ Fees required under 37 CFR 1.18.

SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED

NAME	Peter Saxon
SIGNATURE	
DATE	October 27, 1999

ELECTROPHOTOGRAPHIC PHOTOSENSITIVE
MEMBER AND IMAGE FORMING APPARATUS
USING THE SAME

5 BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to an image forming
apparatus using an electrophotographic process, and an
electrophotographic photosensitive member provided in
10 the image forming apparatus.

Related Background Art

First of all, a construction of an
electrophotographic image forming apparatus will be
described with reference to Fig. 2.

15 Classifying components of the image forming
apparatus as to the electrophotographic process, the
image forming apparatus includes charging means, an
image bearing member as an electrophotographic
photosensitive member, latent image forming means
20 (including charging means and exposure means),
developing means, transfer means, cleaning means,
fixing means and so on.

A charge roller 3 as the charging means is
constituted by providing a sponge layer on a metal
25 shaft and by coating the sponge layer with a resin
layer. The charge roller 3 abuts against a
photosensitive drum (image bearing member) 2 by

pressurizing both ends of the metal shaft of the charge roller 3 so that the charge roller 3 can be rotatingly driven in a direction indicated by the arrow A1 by rotation of the photosensitive drum 2.

5 A charge bias power supply (not shown) for applying AC (alternating current) voltage is connected to the charge roller 3, so that a surface of the photosensitive drum 2 can be charged to a predetermined electric potential.

10 The charging means of AC contact type has an advantage that an occurrence of ozone is very little as compared with the conventional corona charging means. Further, since charge potential of the photosensitive drum 2 can be stabilized to obtain high image quality,
15 the charging means of AC contact type has recently be used mainly as the charging means.

 The photosensitive drum 2 is rotated in a direction indicated by the arrow A2. After the surface of the photosensitive drum 2 is charged by the charge
20 roller 3, a laser beam corresponding to image information is illuminated on the photosensitive drum 2 by exposure means (latent image forming means) 4, thereby forming an electrostatic latent image on the photosensitive drum 2.

25 A resolution of an image is determined by a spot diameter and a scanning speed of the laser beam of the exposure means 4. Presently, although the resolution

of the electrophotographic image forming apparatus is mainly 600 dpi, a higher resolution has been requested.

The developing means includes developer 5 for visualizing the electrostatic latent image on the
5 photosensitive drum 2, a developer container 6 containing the developer 5, a developing sleeve (developer bearing member) 7 for bearing the developer 5, a developer layer thickness regulating member 8 for regulating a thickness of a developer layer on the
10 developing sleeve 7 and for applying predetermined charge.

The developing sleeve 7 is spaced apart from the photosensitive drum 2 with a predetermined gap therebetween and is rotated in a direction indicated by
15 the arrow A3. The electrostatic latent image formed on the photosensitive drum 2 is developed by applying a bias obtained by superimposing DC (direct current) voltage with AC (alternating current) voltage from a developing bias power supply (not shown) to the
20 developing sleeve 7.

A transfer roller 9 is constituted by providing a sponge layer on a metal shaft. A transfer bias power supply (not shown) is connected to the transfer roller 9 and the transfer roller 9 abuts against the
25 photosensitive drum 2.

The transfer roller 9 is rotated in a direction indicated by the arrow A4 at a peripheral speed higher

than a peripheral speed of the photosensitive drum 2.
With this arrangement, a developer image so developed
on the photosensitive drum 2 is transferred onto a
transfer material 10. Unlike a conventional corona
5 transfer system, the transfer roller 9 generates little
ozone and has an excellent ability to convey a transfer
material, therefore the transfer roller has widely been
used in recent years.

After a termination of a transferring process,
10 residual developer 13 which was not transferred remains
on the photosensitive drum 2. The residual developer
13 remaining on the drum 2 is scraped off from the
photosensitive drum 2 by rubbing the drum 2 by a distal
end of a cleaning blade 11 of cleaning means, and the
15 scraped developer is collected into a cleaning
container 14.

An abutment pressure of the cleaning blade 11
against the photosensitive drum 2 is determined in
consideration of balance between a cleaning ability and
20 increase in working-up of the cleaning blade and/or in
rotational torque of the photosensitive drum 2. Such a
cleaning method of blade type has mainly been used as
cleaning means in recent years because it has a simple
construction and excellent cleaning ability.

25 The fixing means 12 serves to form a substantially
permanent image on the transfer material 10 by
pressurizing and heating a non-fixed developer image

transferred to the transfer material 10 to fuse the developer 13 on the transfer material 10.

The fixing means 12 mainly includes a heat roller 12a controlled to a temperature required for fixing, and a pressure roller 12b urged against the heat roller 12a with a predetermined abutment width. In general, in image formation, the heat roller 12a is controlled to a high temperature of 150 to 200 °C.

In this way, a series of image forming steps are finished.

Recently, such electrophotographic image forming apparatuses have been used in the world. Therefore, since various transfer materials have been used under various environmental conditions, an image forming apparatus which can provide a stable image under these conditions has been strongly requested.

However, actually, when such an image forming apparatus is used under a high temperature/high humidity environmental condition, a problem regarding image-flow may arise.

This phenomenon occurs when a transfer material 10 including talc mainly utilized as additive is used, and, in some cases, the image may be completely lost. This phenomenon is one of problems which should surely be avoided.

It is considered that a mechanism for generating the image-flow is as follows. First of all, the talc

included in the transfer material 10 is adhered to the surface of the photosensitive member. Then, under the presence of ozone generated from the charging means, oxide formed around the talc as a core is combined with moisture (due to high humidity), thereby forming low resistance substance on the surface of the photosensitive member. The electrostatic latent image formed on the surface of the photosensitive member is distorted by such low resistance substance.

10 Various attempts have been made to suppress the image-flow. For example, as disclosed in Japanese Patent Application Laid-Open No. 62-160458 (1987), there is a method in which two kinds of polycarbonate resins having different molecular weights are used as
15 binder resin constituting the surface of the photosensitive member and the surface of the photosensitive member is moderately worn. This method aims to efficiently remove the low resistance substance (which causes the image-flow) from the surface of the
20 photosensitive member and achieves great effect.

 However, if the above-mentioned method which effectively suppresses the image-flow is adopted to an image forming apparatus having a charge roller, a transfer roller and a cleaning blade, the
25 photosensitive layer of the photosensitive member is worn unevenly at an abutment area between the photosensitive layer and the cleaning blade so that

there will arise a problem that a streak defective image (referred to as "streak image" hereinafter) is formed along a rotational direction of the photosensitive member.

5 This problem is noticeable in a graphic image more than a character image and is more noticeable in an image forming apparatus having higher resolution. Therefore, in the conventional techniques, it was very difficult to prevent occurrence of the streak image
10 while solving the problem regarding the image-flow.

SUMMARY OF THE INVENTION

 The present invention aims to eliminate the above-mentioned conventional drawbacks, and an object
15 of the present invention is to provide an image bearing member (electrophotographic photosensitive member) which can prevent occurrence of a streak image due to wear of a surface of the image bearing member while preventing occurrence of image-flow, thereby permitting
20 high quality image formation under various environmental conditions.

 To achieve the above object, there is provided an electrophotographic photosensitive member in which the electrophotographic photosensitive member bears a
25 developer image visualized by developer and is slidably rubbed by at least a cleaning member, and an average particle diameter of scraped particles obtained

from a surface of the photosensitive member by the rubbing of the cleaning member is $9.0\text{ }\mu\text{m}$ or less.

Further, a scraped amount from the surface of the photosensitive member may be 16 mg or more per a running distance $1.0 \times 10^6\text{ mm}$ of the photosensitive member (with respect to the member which abuts against the photosensitive member) with respect to a unit width of $2.8 \times 10^2\text{ mm}$ in a longitudinal direction of the photosensitive member.

Further, it is preferable that a surface layer of the photosensitive member mainly includes charge carrier transport material, composition comprised of plural kinds of resins having different particle size average molecular weights, and fluoroplastic particles.

Further, it is preferable that the fluoroplastic particles are 1 to 10 parts by weight of the material constituting the surface layer of the photosensitive member.

An image forming apparatus according to the present invention comprises the above-mentioned photosensitive member for bearing an electrostatic latent image, latent image forming means disposed around the photosensitive member and constituting electrophotographic process means and adapted to form the electrostatic latent image on the photosensitive member, developing means for developing the electrostatic latent image formed on the photosensitive

member with developer, and transfer means for transferring the developed image on the photosensitive member onto a transfer material.

Further, it is preferable that the photosensitive member and at least one of the electrophotographic process means disposed around the photosensitive member are integrally supported in a process cartridge detachably mountable to a main body of the apparatus.

10 BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1A is a chart showing a relationship between an average scraped particle diameter and a scraped weight of an image bearing member, and occurrence of a streak image, and Fig. 1B is a chart showing a relationship between the average scraped particle diameter and the scraped weight of the image bearing member, and image-flow;

Fig. 2 is a sectional view showing a construction of an image forming apparatus having the image bearing member;

Fig. 3A is a sectional view showing a construction of an image bearing member according to a first embodiment of the present invention, and Fig. 3B is a view showing a repeated unit of polycarbonate resin used;

Fig. 4 is a conceptional view showing an idle rotation test;

Fig. 5 is a table showing test results in the first embodiment and comparative examples 1 to 7;

Fig. 6 is a conceptional view showing a mechanism for generating a streak image; and

5 Fig. 7 is a sectional view showing a construction of a process cartridge according to a second embodiment of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

10 [First Embodiment]

 A first embodiment of the present invention will be explained with reference to Fig. 3A. Fig. 3A is a sectional view showing a construction of a photosensitive drum (image bearing member) 2 used in
15 the first embodiment. Incidentally, a construction of an image forming apparatus having the photosensitive drum 2 is the same as that shown in Fig. 2, and duplicated explanation thereof will be omitted.

 The photosensitive drum 2 is constituted by
20 layering an undercoat layer 2b, a charge carrier generation layer 2c and a charge carrier transport layer 2d successively in this order on a base 2a comprised of a hollow aluminum cylinder having a diameter of 24 mm.

25 The undercoat layer 2b is provided for improving adhesion to the charge carrier generation layer 2c, improving coating ability, protecting the base 2a,

coating defect on the base 2a, improving charge carrier injecting ability from the base 2a, and protecting electrical destruction of the photosensitive layer.

It is known to use polyvinyl alcohol, polyethylene oxide, ethyl cellulose and methyl cellulose as material
5 of the undercoat layer 2b. These materials are solved in respective suitable solutions and are coated on the base. A thickness of the undercoat layer is about 0.2 to 2.0 μm .

10 The charge carrier generation layer 2c is provided by adequately dispersing charge carrier generation pigment with solvent and binder resin of 0.5 to 4 times (weight) by a homogenizer, a ultrasonic or a ball mill and effecting coating/drying. A thickness of the
15 charge carrier generation layer is about 0.1 to 1.0 μm .

The charge carrier transport layer 2d is formed by solving charge carrier transport material, blend compound of polycarbonate resin I and polycarbonate resin II, and fluoroplastic particles into solvent and
20 then by coating the solution on the charge carrier generation layer.

The solvent may be ketone class such as cyclohexane, ester class such as methyl acetate or ethyl acetate, ether class such as THF, chlorine-based
25 hydrocarbon class such as chlorobenzene or chloroform.

In the illustrated embodiment, the charge carrier transport layer 2d is constituted as follows. That is

to say, 1. charge carrier transport material, 2.
composition of polycarbonate resin I having viscosity
average molecular weight of 5000 and polycarbonate
resin II having viscosity average molecular weight of
5 20000 in which the polycarbonate resin I having
viscosity average molecular weight of 5000 is included
by 40 parts by weight, and 3. fluoroplastic particles
are included by 2.0 parts by weight with respect to the
total weight of material constituting the charge
10 carrier transport layer 2d.

The charge carrier transport material may be
triallyl amine based compound, hydrazone compound or
stilbene compound.

The polycarbonate resins used in the illustrated
15 embodiment include linear polymer having one or three
kinds of a repeat unit as represented by the general
formula in Fig. 3B.

Incidentally, in the general formula, R12 and R13
are hydrogen atom, and alkyl group or aromatic group,
20 respectively. Further, R12 and R13 may form a ring
structure together with carbon atoms bound thereto.
X1, X2, X3 and X4 indicate hydrogen atom, halogen atom,
and alkyl group or aryl group.

In the illustrated embodiment, Teflon resin is
25 used as the fluoroplastic particle. Although the
average particle diameter is preferably 0.01 to
10 μm , in the illustrated embodiment, the average

particle diameter of 0.2 μm is used.

In general, although strength (wear-resistance and hardness) of resin is increased as molecular weight is increased, if the molecular weight reaches a certain value or exceeds the certain value, the strength is not yet increased to maintain a constant value even when the molecular weight is further increased.

On the other hand, as the molecular weight is decreased, the strength is gradually decreased, and, the molecular weight reaches a certain value or less, the strength is abruptly decreased. In case of polycarbonate resin, the strength is abruptly decreased when the molecular weight is 15000 to 20000. Therefore, by including a certain amount of resin having lower molecular weight, moderate wear (abrasion) ability can be maintained.

In the illustrated embodiment, a ratio in the blend compound between the polycarbonate resin I and the polycarbonate resin II is preferably selected so that the polycarbonate resin I having viscosity average molecular weight of 15000 or less is included by 30 to 95 parts by weight with respect to the blend compound.

If the polycarbonate resin I is less than 30 parts by weight, the moderate abrasion ability cannot be obtained not to achieve the above-mentioned effect. Conversely, if the polycarbonate resin I exceeds 95 parts by weight, there will arise problems regarding

excessive abrasion ability and reduction in viscosity.

The molecular weight of the polycarbonate resin I is desirably 15000 or less which causes abrupt reduction of the strength.

5 Further, if content of Teflon resin particles is 1 part by weight or less with respect to the total weight of material constituting the charge carrier transport layer 2d, adequate effect for suppressing wear of the photosensitive member 2 cannot be attained. On the
10 other hand, if such content is 10 parts by weight or more, the adequate wear amount cannot be obtained to exacerbate the image-flow. This is also not preferable. Thus, it is preferable that the content of Teflon resin particles is 1 to 10 parts by weight. In
15 the illustrated embodiment, 5.0 parts by weight is selected.

Experiments for ascertaining the effect of the present invention were performed by using the image forming apparatus explained in connection with Fig. 2
20 into which the photosensitive drum 2 as mentioned above is incorporated.

Incidentally, although the present invention can be applied to a case where the abutment pressure of the cleaning blade 11 is 20 to 80 gf/cm, in the illustrated
25 embodiment, the abutment pressure of the cleaning blade 11 was selected to 40 gf/cm.

<Experiment 1>

Under a standard environmental condition
(temperature of 25 °C, relative humidity of 60 %), as
shown in Fig. 4, the charge roller 3 (charging bias =
5 1.800 Vpp, charging frequency = 400 Hz) and the
cleaning blade 11 (abutment pressure = 40 gf/cm) were
urged against the photosensitive drum 2, an idle
rotation experiment was effected for 30 hours at a
rotating speed of 50 mm/sec of the photosensitive drum
10 2 without development. Incidentally, in this
experiment, the total running distance of the
photosensitive drum 2 was 5.4×10^6 mm, and, by
utilizing a unit width of 2.8×10^2 mm in the
longitudinal direction of the photosensitive drum 2 as
15 a reference, scraped particles of the photosensitive
layer accumulated in the cleaning container 14 were
picked, and particle size distribution and scraped
weight were measured (for a photosensitive drum having
different length, scraped weight is increased or
20 decreased in proportion to the unit width in the
longitudinal direction).

Incidentally, measurement of particle diameter was
performed by using a Coulter Multianalyzer manufactured
by Coulter K.K.. Further, by assuming that the scraped
25 particles have spherical shapes, the scraped number n
of the scraped particles was calculated on the basis of
the measurement result. The calculation was effected

by using the following calculation formula:

$$n = x / ((4\pi r^3 / 3) \times \rho)$$

(where, x is total scraped amount, r is average particle diameter, and ρ is mass of one particle having a diameter equal to the average particle diameter.)

<Experiment 2>

Under a standard environmental condition (temperature of 25 °C, relative humidity of 60 %), an intermittent endurance experiment was effected for 5000 sheets.

In this case, presence/absence of streak image occurrence was evaluated, and scraped film thickness of the photosensitive drum 2 and ten-point-average roughness Rz of the surface of the photosensitive drum 2 after the endurance experiment were measured.

Film thicknesses of the photosensitive drum 2 before and after the endurance experiment were measured by a Permascope manufactured by Fischer Instruments K.K. and a difference between is defined as the scraped film thickness of the photosensitive drum 2. The ten-point-average roughness Rz was measured with measurement length of 2.5 mm on the basis of JIS Surface Roughness B0601.

<Experiment 3>

Under a high temperature and high humidity environmental condition (temperature of 30.0 °C, relative humidity of 85 %), continuous endurance

experiment with images of printing ratio of 2.5 % was effected for 5000 sheets, and the image-flow was evaluated. Transfer materials 10 including talc as additive were used.

5 <Results>

Experimental results of the Experiments 1 to 3 are shown in Fig. 5. In the Experiment 1 the average particle size of the scraped particle of the photosensitive drum 2 was 7.3 μm , and the scraped
10 amount was 99 mg. Incidentally, the scraped number will be described later.

Further, in the Experiment 2, the streak defect did not appear on the image at all and the good image could be obtained. In the Experiment 3, the image-flow
15 did not occur at all for 5000 sheets and the good image could be obtained.

From the above experimental results, it was found that, when the photosensitive drum 2 according to the illustrated embodiment is used, both the streak image
20 and the image-flow can be prevented.

Then, in order to more clarify the effect of the present invention, comparative experiments were performed. The experiment conditions are the same as those in the first embodiment. Regarding the following
25 comparative examples, the above-mentioned experiments 1 to 3 were effected. The experimental results will be explained with reference to Fig. 5.

<Comparative example 1>

(1) Photosensitive drum

Material including no Teflon resin was used as the charge carrier transport layer 2d. A thickness of
5 coating of the charge carrier transport layer was 25 μm . The others were the same as those in the first embodiment.

(2) Abutment pressure of cleaning blade

Similar to the first embodiment, abutment pressure
10 of 40 gf/cm was selected.

<Comparative examples 2 to 7>

(1) Photosensitive drum

Material including Teflon resin of 1.0 to 20 parts by weight was used as the charge carrier transport
15 layer 2d. Respective parts by weight are shown in Fig. 5. The others were the same as those in the first embodiment.

(2) Abutment pressure of cleaning blade

In the comparative examples 2 to 6, abutment
20 pressure of 40 gf/cm was selected, and, only in the comparative example 7, abutment pressure of 80 gf/cm was selected.

<Comparative examples 8, 9>

(1) Photosensitive drum

25 Only polycarbonate resin having viscosity average molecular weight of 20000 was used as binder resin for the charge carrier transport layer.

(2) Abutment pressure of cleaning blade

In the comparative example 8, abutment pressure of 40 gf/cm was selected, and in the comparative example 9, abutment pressure of 80 gf/cm was selected.

5 <Experimental results of comparative examples 1 to 7>

The results are shown in Fig. 5. In the Experiment 1, it was found that the scraped weight, average particle size and ratio of scraped number (value obtained when the scraped number of the first
10 embodiment is converted into 100) of the scraped particles of the photosensitive drum 2 were all decreased as content of Teflon resin was increased.

In the Experiment 2, in case of the photosensitive drum 2 having Teflon resin amount of 1.0 part by weight
15 or less (comparative examples 1, 2), the streak image was generated, and, in case of the photosensitive drum 2 having Teflon resin amount of 2.0 parts by weight or more (comparative examples 3 to 6), the streak image was not generated.

20 On the other hand, in the Experiment 3, in case of the photosensitive drum 2 having Teflon resin amount of 2.0 parts by weight or less (comparative examples 1 to 3), the image-flow did not occur at all for 5000 sheets, and, in case of the photosensitive drum having
25 Teflon resin amount of 10.0 parts by weight (comparative example 4), only slight image-flow occurred (to the extent that characters become slightly

thin). However, in case of the photosensitive drum having Teflon resin amount of 15.0 parts by weight or more (comparative examples 5, 6), the worst image-flow completely loosing characters from the image occurred.

5 Further, in the comparative example 7 in which the same photosensitive drum 2 as the first embodiment was used and the abutment pressure of the cleaning blade 11 was increased, the streak image and the image-flow did not occur.

10 <Experimental results of comparative examples 8, 9>

The results are show in Fig. 5. As a result of the Experiment 1, in the comparative example 8, the average particle size of the scraped particles of the photosensitive drum 2 was 12.1 μm , the scraped weight
15 of the scraped particles was 95 mg and the ratio of the scraped number was 31 (few). Further, in the comparative example 9 in which the same photosensitive drum 2 as the comparative example 8 was used and the abutment pressure of the cleaning blade 11 was
20 increased, both the scraped weight and the ratio of the scraped number were increased in comparison with the comparative example 8, but, the ratio of the scraped number was about half of that in the first embodiment.

Further, regarding the Experiment 2, in the
25 comparative example 8, the streak image did not occur for 5000 sheets, but, in the comparative example 9, the slight streak image occurred.

On the other hand, as a result of the Experiment 3, in the comparative example 8, the image-flow occurred at an earlier stage of endurance (about 200-th sheet). Also in the comparative example 9, the
5 image-flow occurred at a stage of about 2000-th sheet.

In consideration of the above results, frequency of occurrence of the streak image and the image-flow will be explained with reference to Fig. 5. and Figs. 1A and 1B. Fig. 1A is a chart showing a relationship
10 between occurrence of the streak image and a state of the scraped particle in the result shown in Fig. 5, and Fig. 1B is a chart showing a relationship between occurrence of the image-flow and a state of the scraped particle.

15 The frequency of occurrence of the streak image and the image-flow is determined by the state of the scraped particle of the photosensitive drum 2 (scraped particle diameter and scraped weight (scraped amount)).

That is to say, in order to eliminate both the
20 streak image and the image-flow simultaneously, control is required so that (1) the average particle diameter of the scraped particles be reduced as less as possible in order to prevent occurrence of the streak image and (2) the scraped weight of the scraped particles be
25 increased as much as possible in order to prevent occurrence of the image-flow.

As apparent from the result shown in Fig. 5, so

long as the particle diameter of the scraped particles is not so small and the scraped weight is not so great, either the streak image or the image-flow will occur.

Now, a relationship between the particle diameter
5 and scraped weight of the scraped particles, and the streak image and image-flow will be described.

<Influence upon streak image>

First of all, a mechanism for generating the
streak image will be explained with reference to Fig.
10 6.

Paper powder particles 16 existing on the surface
of the transfer material 10 is contacted with the
surface of the photosensitive drum 2 in a nip portion
17 between the photosensitive drum 2 and the transfer
15 roller 9.

The paper powder particles 16 are pinched between
the cleaning blade 11 and the photosensitive drum 2.
Since uneven wear (abrasion) occurs at a position where
the paper powder particles 16 are pinched, a portion of
20 the photosensitive drum 2 is scratched along a
circumferential direction thereof. Therefore, the
defective image in the shape of streak occurs at the
corresponding position.

This phenomenon is apt to occur when the
25 above-mentioned charging means of contact type to which
the AC bias is applied is used, because the surface of
the photosensitive drum 2 becomes weak when the AC bias

is applied to the charge roller 3.

When the above-mentioned transfer roller 5 is used, a force for urging the transfer material 10 against the photosensitive drum 2 is stronger in comparison with the corona transferring. Thus, since the paper powder particles 16 of the transfer material 10 is apt to be adhered to the photosensitive drum 2, uneven abrasion of the photosensitive drum 2 is apt to occur.

Accordingly, when the particle diameter of the scraped particles is great, depths of scratches generated in correspondence to the positions where the paper powder particles 16 are pinched between the photosensitive drum 2 and the cleaning blade 11 become great, thereby scraped spots are generated in the photosensitive layer, with the result that the surface roughness Rz of the photosensitive drum 2 after the endurance experiment becomes great. This phenomenon becomes noticeable at a latter stage of the endurance experiment in which the uneven abrasion of the photosensitive drum 2 grows, and, when the scraped amount is increased, the streak image appears.

On the other hand, when the particle diameter of the scraped particles becomes small, since the depths of scratches generated on the surface of the photosensitive drum 2 become smaller, the surface roughness Rz of the photosensitive drum 2 after the

endurance experiment can be reduced.

Further, as apparent from the result of the comparative example 7 shown in Fig. 5, since the particle diameter of the scraped particles is small, even if the scraped amount of the photosensitive layer is increased, occurrence of the streak image can be suppressed.

According to Inventors' investigation, as shown in Fig. 1A, it was found that, when the average scraped particle diameter of the scraped particles is controlled to 9.0 μm or less, even if the scraped amount is increased, occurrence of the streak image can be prevented.

<Influence upon image-flow>

Now, a relationship between the scraping of the photosensitive drum 2 and the image-flow will be explained on the basis of the result of the Experiment 1 with reference to Figs. 5 and 1B.

The problem regarding the image-flow can be eliminated by scraping (abrading) the low resistance substance adhered to the surface by the cleaning blade 11. Accordingly, in order to prevent the image-flow fundamentally, the more the scraped amount of the photosensitive layer of the photosensitive drum 2, the better.

However, regarding the scraped amounts of the photosensitive drum 2 in the first embodiment and the

comparative example 9, in spite of the fact that the scraped amount is greater in the comparative example 9, the image-flow does not occur in the first embodiment, whereas the exacerbated image-flow occurs in the comparative example 9. This fact can be explained by comparing the scraped numbers of the photosensitive layer of the photosensitive drum 2 in the Experiment 1.

Presence/absence of occurrence of the image-flow also correlates to the scraped number of the photosensitive layer. For example, as is in the first embodiment, even when the particle diameter of the scraped particles is small and the total scraped weight is small, if the scraped number of the photosensitive layer is great, the surface of the photosensitive layer of the photosensitive drum 2 is polished perfectly, the low resistance substance can be scraped completely, thereby preventing the occurrence of the image-flow.

On the other hand, as is in the comparative example 9, when the particle diameter of the scraped particles is great, since the total scraped weight is great but the scraped number is small, the surface of the photosensitive drum 2 is polished unevenly along the longitudinal direction thereof to create spots, with the result that the low resistance substance cannot be scraped completely. As a result, the image-flow occurs. For this reason, the image-flow may not be prevented even when the scraped weight is great.

According to the Inventors' investigation, as shown in Fig. 1B, it was found that, in the case where the particle diameter of the scraped particles is 9.0 μm or less, when the idle rotation experiment as in the Experiment 1 is performed, so long as the scraped weight is controlled to 16 mg or more, the image-flow can be prevented.

As mentioned above, in the present invention, as shown in Fig. 1A, since the average scraped particle diameter of the scraped particles from the photosensitive member is 9.0 μm or less, the occurrence of the streak image can be prevented. Further, in a condition that the charging means and the cleaning means are urged against the photosensitive member and the photosensitive member is charged by applying AC voltage to the charging means, when the idle rotation experiment is effected, as shown in Fig. 1B, so long as the scraped amount of the photosensitive layer of the photosensitive member is 16 mg or more per the running distance of 1.0×10^6 mm, the occurrence of the image-flow can be prevented at the same time.

Further, in the present invention, since the photosensitive layer is polished slightly and therefore the coating thickness of the surface layer of the photosensitive drum 2 is not required to be thickened specially, the manufacturing cost can be reduced.

[Second Embodiment]

Next, a second embodiment of the present invention

will be described with reference to Fig. 7.

The second embodiment is characterized in that the photosensitive drum 2, the cleaning blade 11, the charge roller 3 and the developing means 6 (which are
5 explained in connection with the first embodiment) are integrally incorporated to form a process cartridge detachably mountable to a main body of the image forming apparatus.

As explained in connection with Fig. 2, the
10 developing means 6 includes the developer 5, the developing sleeve 7 and the developer layer thickness regulating member 8.

By using such a process cartridge, not only the effect same as that in the first embodiment can be
15 achieved, but also an image forming apparatus having maintenance free and excellent usability can be provided.

Incidentally, the process cartridge PC may be divided into a block BR-A and a block BR-B which are
20 shown by the broken lines in Fig. 7.

According to the invention, the streak image and the image-flow are prevented from occurring by determining the characteristic of surface of the photosensitive member based on the particle diameter
25 and the scraped amount of the scraped particles from the surface of the electrophotographic photosensitive member. Therefore, it makes it possible to form a high quality image under various circumstances.

WHAT IS CLAIMED IS:

1. An electrophotographic photosensitive member which bears a developer image visualized by developer and which is rubbed by at least a cleaning member,
5 wherein:

an average particle diameter of a scraped particle obtained from a surface of the photosensitive member by a rubbing of said cleaning member is $9.0\text{ }\mu\text{m}$ or less.

10 2. An electrophotographic photosensitive member according to claim 1, wherein a scraped amount from the surface of the photosensitive member is 16 mg or more per a running distance 1.0×10^6 mm of the photosensitive member relative to said cleaning member
15 which abuts against the photosensitive member with respect to a unit width of 2.8×10^2 mm in a longitudinal direction of the photosensitive member.

20 3. An electrophotographic photosensitive member according to claim 1, wherein a surface layer of the photosensitive member comprises a charge carrier transport material, a composition including plural kinds of resins having different viscosity average molecular weights, and fluoroplastic resin particles.

25

4. An electrophotographic photosensitive member according to claim 3, wherein said fluoroplastic resin

particles are 1 to 10 parts by weight of materials constituting said surface layer of the photosensitive member.

- 5 5. An image forming apparatus comprising:
a photosensitive member for bearing an electrostatic latent image, as recited in any one of claims 1 to 4;

latent image forming means disposed around
10 said photosensitive member and constituting electrophotographic process means and for forming the electrostatic latent image on said photosensitive member;

developing means for developing the
15 electrostatic latent image formed on said photosensitive member; and

transfer means for transferring a visualized image on said photosensitive member onto a transfer material.

20

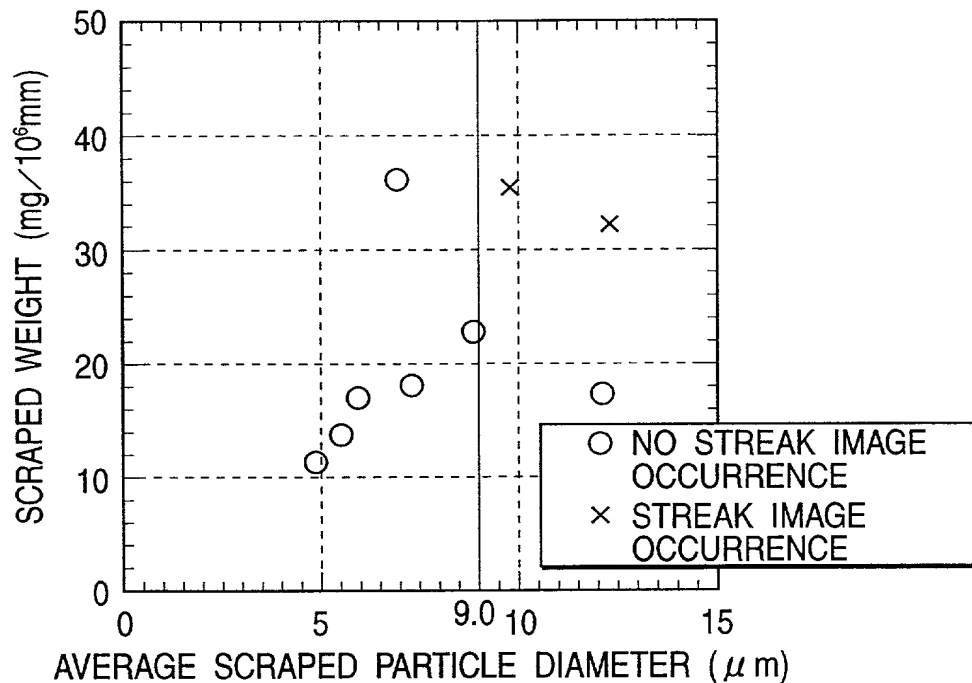
6. An image forming apparatus according to claim 5, wherein said photosensitive member and at least one of said electrophotographic process means disposed around said photosensitive member are integrally formed
25 as a process cartridge detachably mountable to a main body of the image forming apparatus.

ABSTRACT OF THE DISCLOSURE

A photosensitive member which can prevent occurrence of a streak image due to wear of a surface of the photosensitive member while preventing occurrence of image-flow is provided, and an average particle diameter of a scraped particle obtained from a surface of the photosensitive member by the rubbing of a cleaning member is 9.0 μm or less.

FIG. 1A

RELATIONSHIP BETWEEN PRESENCE/ABSENCE OF STREAK
IMAGE OCCURRENCE AND STATE OF SCRAPED PARTICLE

**FIG. 1B**

RELATIONSHIP BETWEEN PRESENCE/ABSENCE OF IMAGE
FLOW OCCURRENCE AND STATE OF SCRAPED PARTICLE

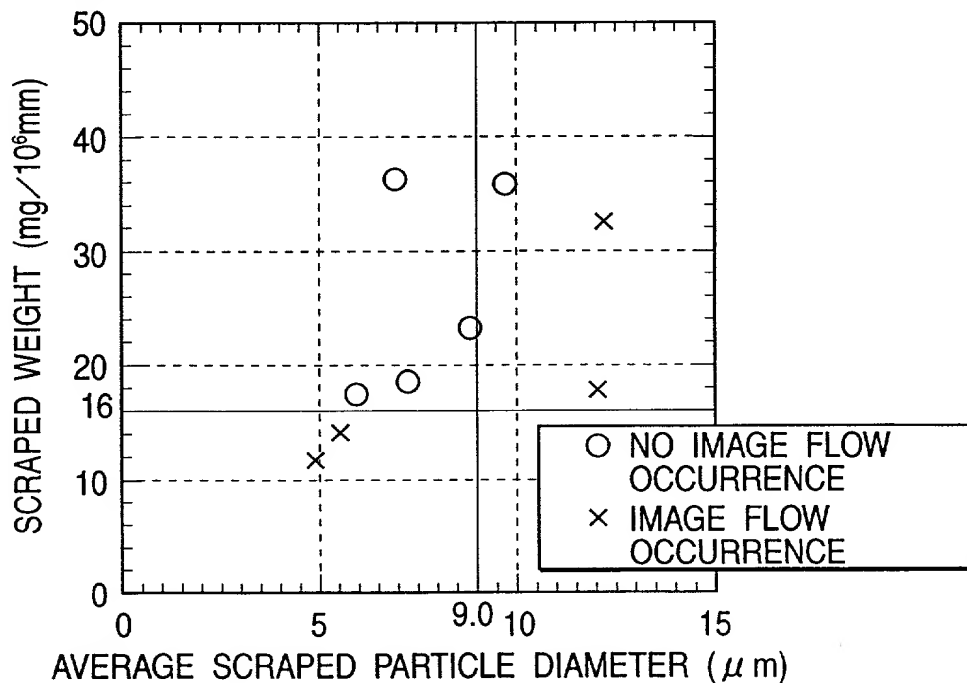


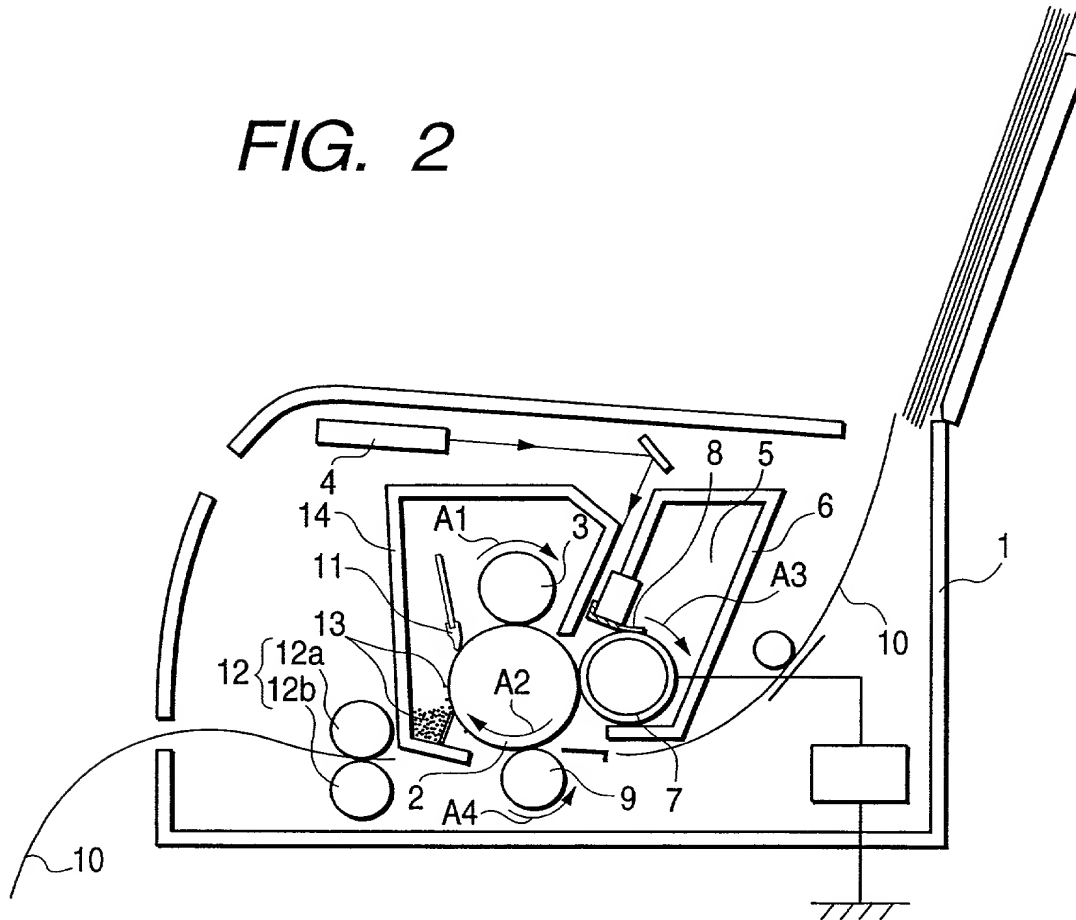
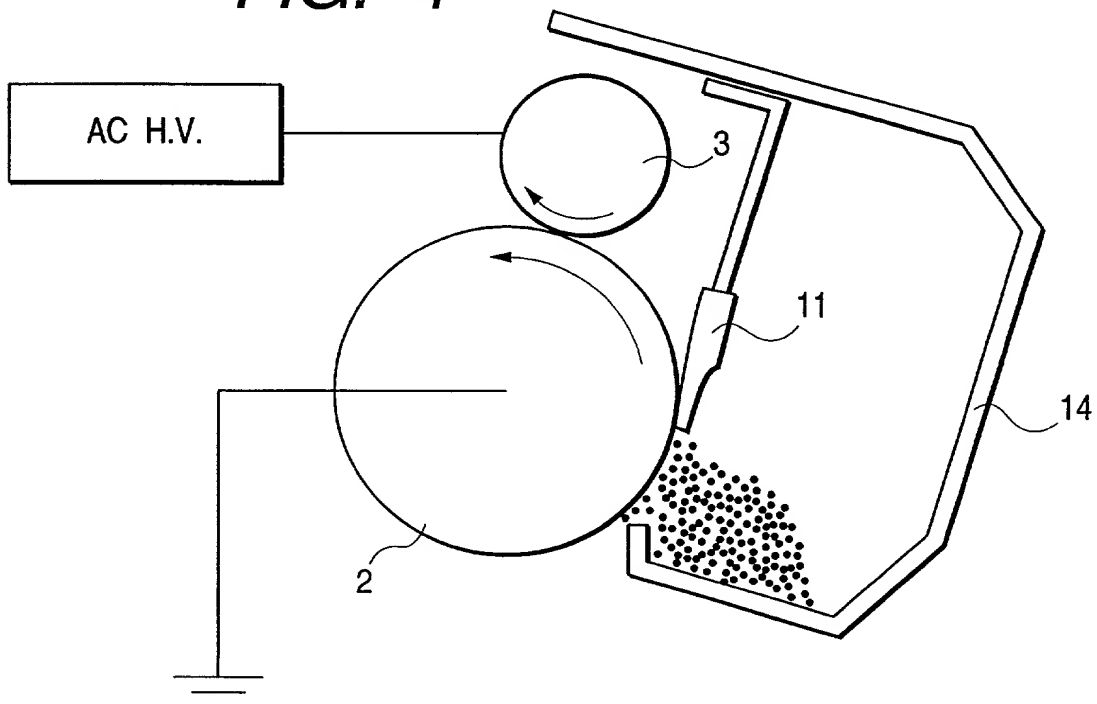
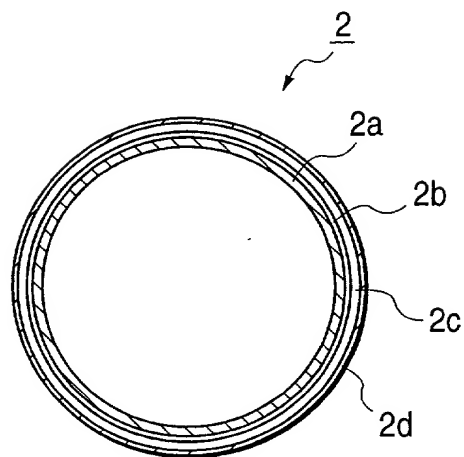
FIG. 2**FIG. 4**

FIG. 3A*FIG. 3B*

GENERAL FORMULA

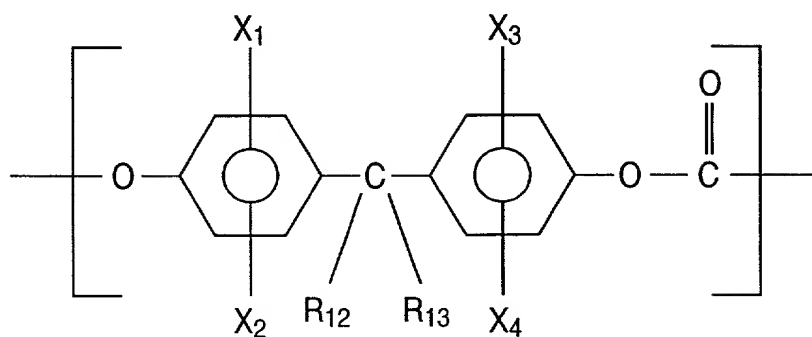


FIG. 5

	POLYCARBONATE RESIN I (PARTS BY) (WEIGHT)	POLYCARBONATE RESIN II (PARTS BY) (WEIGHT)	TEFLON AMOUNT (PARTS BY WEIGHT)	CLEANING BLADE ABUTMENT PRESSURE (gf/cm)	EXPERIMENT 1			EXPERIMENT 2		EXPERIMENT 3	
					AVERAGE PARTICLE DIAMETER (μm)	SCRAPED WEIGHT (mg/10 ⁶ mm ²)※1	RATIO OF SCRAPED NUMBER (※2)	IMAGE FLOW (※3)	STREAK IMAGE	DRUM SCRAPED FILM THICKNESS (μm)	DRUM SURFACE ROUGHNESS RZ (μm)
EMBODIMENT 1	60	40	5.0	40	7.3	18.3	100	○	○	5.0	0.9
COMPARATIVE EXAMPLE 1	60	40	0	40	11.5	51.3	106	○	×	10.0	1.7
COMPARATIVE EXAMPLE 2	60	40	1.0	40	9.8	35.7	101	○	×	8.5	1.5
COMPARATIVE EXAMPLE 3	60	40	2.0	40	8.9	23.0	101	○	○	6.0	1.0
COMPARATIVE EXAMPLE 4	60	40	10.0	40	6.0	17.2	94	△	○	3.5	0.6
COMPARATIVE EXAMPLE 5	60	40	15.0	40	5.6	13.9	75	×	○	3.1	0.5
COMPARATIVE EXAMPLE 6	60	40	20.0	40	4.9	11.5	62	×	○	2.6	0.5
COMPARATIVE EXAMPLE 7	60	40	5.0	80	7.0	36.3	189	○	○	9.7	1.1
COMPARATIVE EXAMPLE 8	100	0	0	40	12.1	17.6	31	×	○	3.0	0.6
COMPARATIVE EXAMPLE 9	100	0	0	80	12.3	32.4	56	×	×	4.3	0.9

※1: SCRAPED WEIGHT PER RUNNING DISTANCE 1.0×10⁶mm OF DRUM

※2: RESULT OF EMBODIMENT 1 IS CONVERTED INTO 100.

※3: ○ NO OCCURRENCE, × OCCURRENCE, △ SLIGHTLY OCCURRENCE(TOLERABLE LEVEL)

FIG. 6

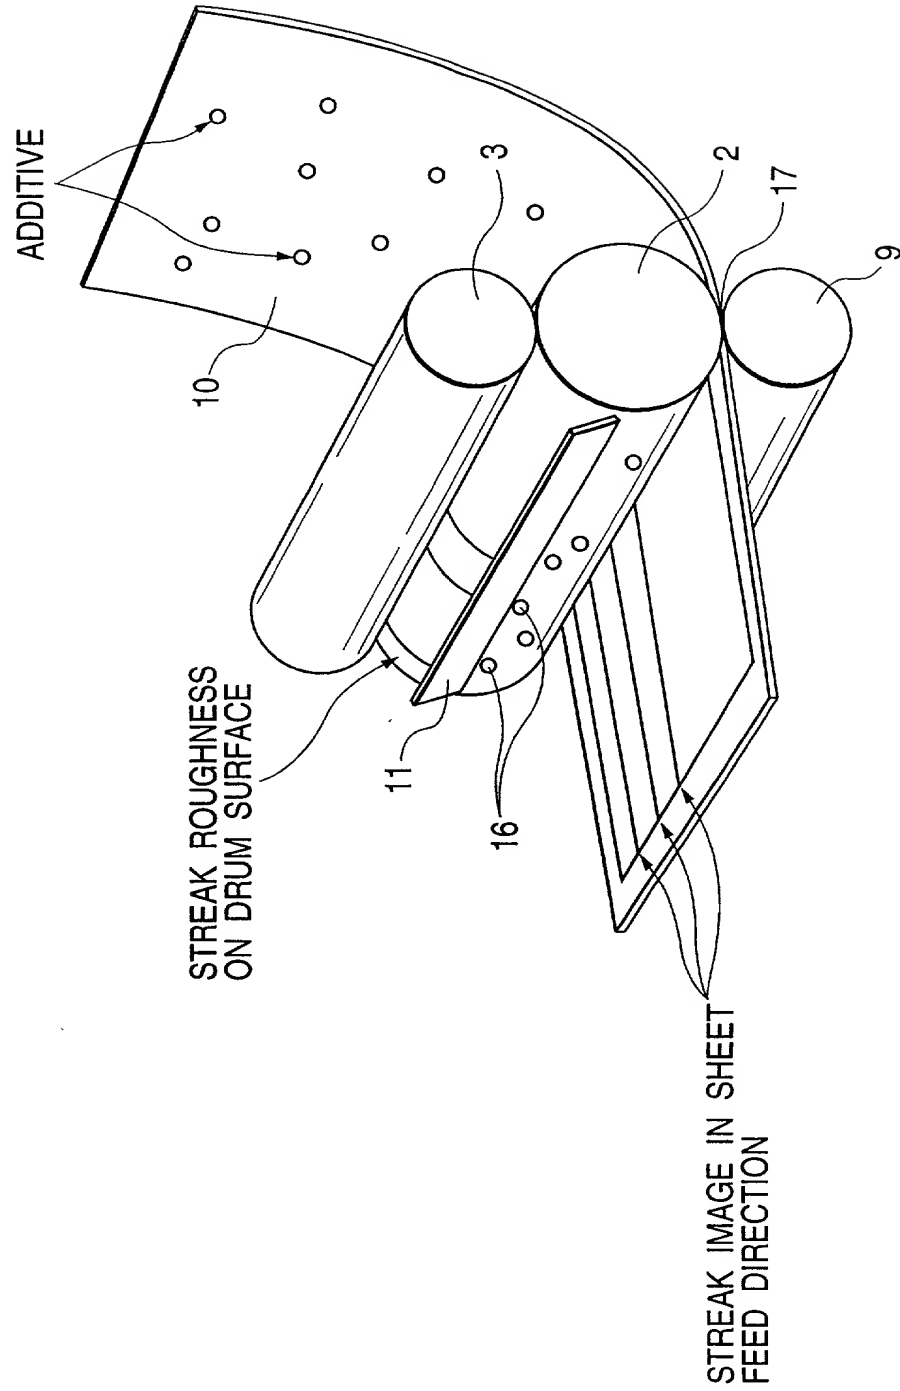
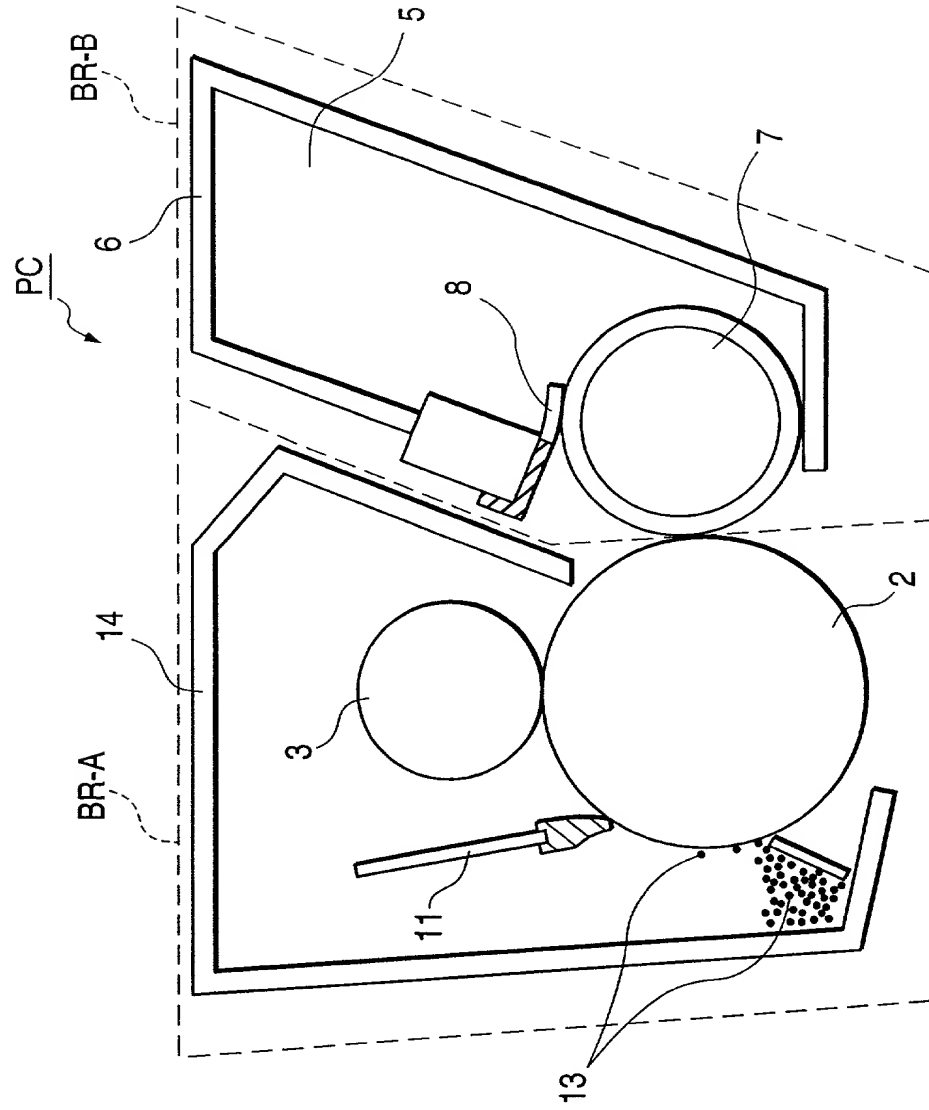


FIG. 7



**COMBINED DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION
(Page 1)**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled ELECTROPHOTOGRAPHIC PHOTSENSITIVE MEMBER AND IMAGE FORMING APPARATUS USING THE SAME

the specification of which ☒ is attached hereto ☐ was filed on _____ as United States Application No. or PCT International Application No. _____ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR §1.56.

I hereby claim foreign priority benefits under 35 U.S.C. §119(a)-(d) or §365(b), of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT international application which designates at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate, or PCT international application having a filing date before that of the application on which priority is claimed:

<u>Country</u>	<u>Application No.</u>	<u>Filed (Day/Mo./Yr.)</u>	<u>(Yes/No)</u> <u>Priority Claimed</u>
Japan	10-325861	October 30, 1998	Yes

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s), or § 365(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 C.F.R. § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

<u>Application No.</u>	<u>Filed (Day/Mo./Yr.)</u>	<u>Status (Patented, Pending, Abandoned)</u>
Not applicable		

I hereby appoint the practitioners associated with the firm and Customer Number provided below to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, and direct that all correspondence be addressed to the address associated with that Customer Number:

FITZPATRICK, CELLA, HARPER & SCINTO
Customer Number: 05514

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole or First Inventor SATORU MOTOHASHI

Inventor's signature _____

Date _____ Citizen/Subject of Japan

Residence 10-33, Shin-machi 4-chome, Toride-shi, Ibaraki-ken, Japan

Post Office Address c/o Canon Kabushiki Kaisha

30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo, Japan

(Page 2)

Second Inventor's signature

Date _____

Citizen/Subject of Japan

Post Office Address c/o Canon Kabushiki Kaisha

Full Name of Third Joint Inventor, if any MASANOBU SAITO

Third Inventor's signature

Date _____

Citizen/Subject of Japan

Post Office Address c/o Canon Kabushiki Kaisha

Full Name of Fourth Joint Inventor, if any GAKU KONISHI

Fourth Inventor's signature

Date _____

Citizen/Subject of Japan

Post Office Address c/o Canon Kabushiki Kaisha

Full Name of Fifth Joint Inventor, if any YASUSHI SHIMIZU

Fifth Inventor's signature

Date _____

Citizen/Subject of Japan

Post Office Address c/o Canon Kabushiki Kaisha

Full Name of Sixth Joint Inventor, if any HIROSHI SATO

Sixth Inventor's signature

Date _____

Citizen/Subject of JapanPost Office Address c/o Canon Kabushiki Kaisha

30-2, Shimomaruko 3-chome, Ohtu-ku, Tokyo, Japan

(Page 3)

30-2, Shimomaruko 3-chome, Ohtu-ku, Tokyo, Japan

Figure 1